

AIR POWERED FLUX RECOVERY SYSTEM

INTRODUCING
THE "ULTRA LIGHTWEIGHT"

XP-3TRAC

NEW
PRODUCT!

LIGHTWEIGHT, VERY COMPACT, RUGGED AND POWERFUL; THE XP-3TRAC MOUNTS EASILY ONTO MOST AUTOMATIC SUBMERGED ARC WELDING TRACTORS. ALSO IDEAL FOR OTHER APPLICATIONS WHERE SIZE AND WEIGHT ARE IMPORTANT FACTORS.



XP-3TRAC mounted on Lincoln LT-7 tractor in butt weld position. This system represents standard XP-3TRAC package which includes NZ-1 nozzle, FHM-1 hose bracket, 5 ft. (1.5 m) 1 1/2" (3.81 cm) hose, mounting bracket for XP-3TRAC to LT-7 and XP-3TRAC recovery machine. (Note: consult factory for mounting packages for other welding tractors).

IMPORTANT FEATURES:


- Ultra lightweight and compact.
- Continuously feeds recovered flux to welding nozzle without need of any transfer valve.
- Slag, dust and fines are automatically removed from recovered flux.
- No moving parts in air pump. Very efficient air pump produces higher vacuum. Uses less air and is quieter than most competitive models.

OPTIONAL ACCESSORIES:

- RFHM-7 rear hose mounting bracket for LT-7 tractor. Use for fillet welding, or web to flange welds or when welding between tractor wheels.
- NZ-1 CRN corner weld pick-up nozzle.
- NZ-1 BUTT butt weld nozzle. (This nozzle drags on plate. Use with FHM-1 ADJ hose bracket.
- FHM-1 ADJ hose bracket. Allows NZ-1 BUTT nozzle to follow up/down contours of plate.

SPECIFICATIONS:

- **Weight Empty:** 12 lbs. (5.4 kg); total added wt. = 9 lbs. (4 kg) i.e., because Lincoln hopper is removed.
- **Dimensions:** 18" (45.7 cm) H x 10" (25.4 cm) W x 8" (20.3 cm) D
- **Input Power:** Clean and dry compressed air @ 70-100 psi (5-7 bar) @ 8 cfm (226 l/min). No electrical input required.
- **Comes complete with** 5 ft. (1.5 m) hose, nozzle, mounting brackets for XP-3TRAC and hose mounting bracket... ready for installation!

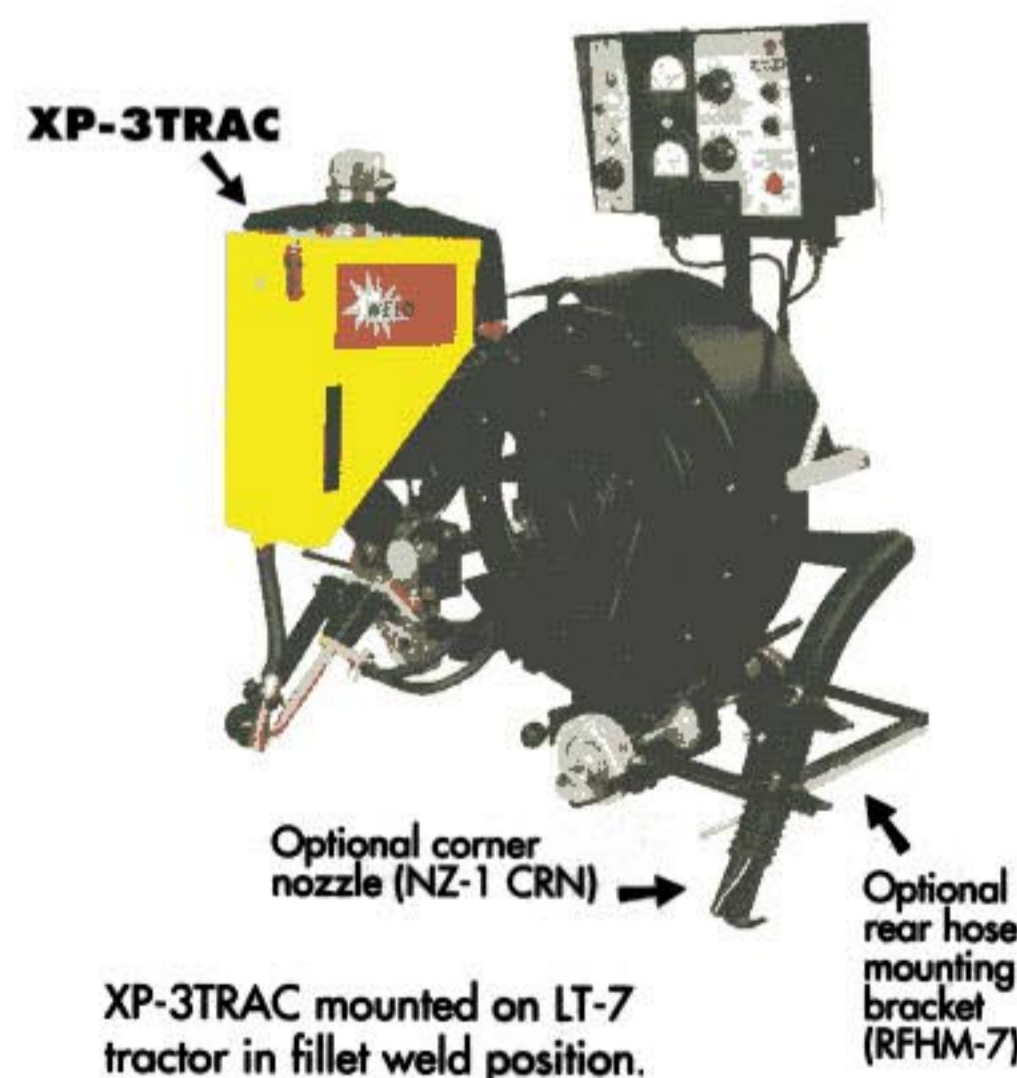

For ordering information
please contact:

WELD
ENGINEERING CO., INC.

34 Fruit St.
Shrewsbury, MA 01545 (U.S.A.)
Telephone: (508) 842-2224
Fax: (508) 842-3893